



**Features:**

- \* Demonstrates the principle of Doppler shift of reflected electromagnetic wave from a moving object
- \* Speed, rotation, level control, contact less vibration measurement
- \* Observation and measurements with software
- \* Microwave operation
- \* High gain Parabolic antenna provided for narrow beamwidth and clutter reduction.
- \* PC based oscilloscope provided
- \* FFT with cursor measurement

**Technical Specifications**


**Microwave Transceiver:**

- Type : MMIC transceiver with parabolic dish antenna
- Antenna Size : 25cm dia with f/d 0.25
- Frequency : Microwave DRO stabilized
- Output Level : 0 dBm typical
- Sensitivity : -70dBm typical
- Output : PC Compatible
- Power Supply : 100-240V, 47-63 Hz

**Software:**

- Display : Responsive real-time up to 50 fps refresh
- Bandwidth : 10 Hz - 20 kHz, AC coupling
- Timebase : 10 us - 5 s
- ADC : 8-bit and 16-bit acquisition
- Sampling : 11 kHz to 44 kHz rate
- FFT : Amplitude and/or phase System
- PC required : Windows® 7 or 8 sound card,(Not supplied)
- Data export : Raw data export as WAV file
- Screenshot : Saved in BMP and EMF formats
- Visible trace : can be saved as text file

Note: Specifications are subject to change.

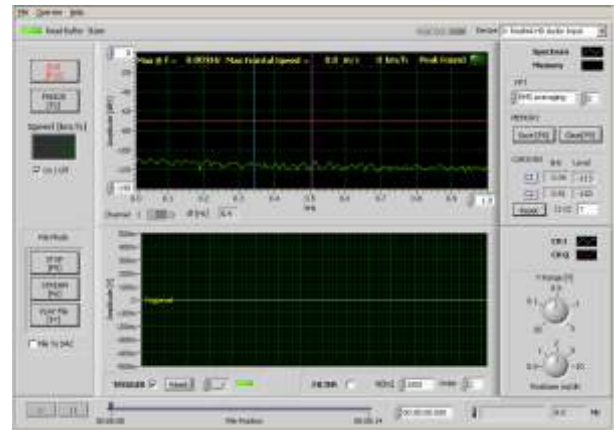

- Function : Copy-paste for screenshots or data files - Printing,
- Triggering : Adjustable trigger level, slope, and delay
- Pretrigger : View - Single shot triggering mode
- Measure : On screen - Two cursors set by left and right click - Voltage and time difference readout - Direct frequency readout

**Radar Jammer cum Moving Target Emulator:**

- Range : 0 to 1000km/hr

**List of experiments:**

- \* To investigate the fundamental concepts of Doppler radar
- \* To setup radar and tune it for best performance
- \* To measure speed of a fan
- \* To detect the presence of a hidden Time Bomb with the help of a Doppler radar
- \* To find out the Time period and frequency of a moving Pendulum for different lengths
- \* To actuate the opening of a door, Traffic signal, Intrusion alarm etc. with the help of a radar
- \* To measure the units of items being produced in an assembly line production unit
- \* To determine the presence of moving plasma from one electrode to other in a Tube light
- \* To detect the presence of transformer hum and find its frequency
- \* To measure the variable speeds of moving objects using Velocity simulator
- \* Calibration of Doppler radar using tuning fork
- \* To study the reflective, absorptive and transmissive properties of materials using radar and velocity simulator
- \* To find the speed of a moving object with Doppler radar from different angles
- \* To find the speed of a moving object approaching or receding away from radar from different-different angles
- \* To estimate the size of a moving objects using Radar
- \* To find out the presence of a Pedestrian and manage Traffic till he walks away
- \* To find out the presence of an aero plane with the rotation of the turbine of its engine as used by Air Force
- \* To study the use of radar in detecting respiration and heart beating
- \* Study of climatic conditions of atmosphere cyclones, Clouds, tornado using a Doppler radar

**Accessories**

- \* Tuning Fork, Buzzer, Turbine Fan, Pendulum